




# LAGERBEHÄLTER

nach DIN 6618

## Stehende Lagerbehälter DIN 6618

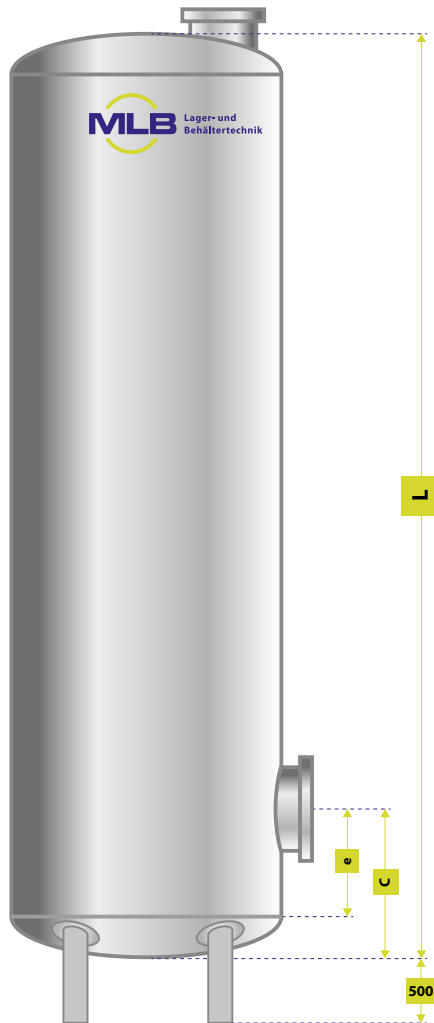

Nenninhalt Liter	Durchmesser ca. mm	Höhe ohne Füße ca. mm	Blechdicke mm	Gewicht einwandig ca. / kg	Gewicht doppelwandig ca. / kg
	<b>D</b>	<b>L</b>	<b>t*</b>		
5.000	1.600	2.740	5	1.010	1.340
7.000		3.740		1.145	1.590
10.000		5.350		1.460	2.090
13.000		6.770		1.760	2.590
10.000	2.000	3.630	6	1.655	2.230
13.000		4.490		1.885	2.570
16.000		5.450		2.295	2.900
20.000		6.740		2.580	3.640
25.000	2.500	8.340	7	3.030	4.300
20.000		4.710		2.815	4.140
25.000		5.685		3.175	4.750
30.000		6.665		3.675	5.420
40.000	2.900	8.800	9	4.575	6.810
30.000		5.000		4.490	6.120
40.000		6.550		5.405	7.510
50.000		8.100		6.640	9.190
60.000	2.900	9.620	9	7.390	10.380
80.000		12.700		9.675	13.550
100.000		15.800		11.675	16.470

\* bzw nach statischen Erfordernissen

